


Oil Pattern Distance	43	Reverse Brush Drop	35	Oil Per Board	50 ul
Forward Oil Total	17.9 mL	Reverse Oil Total	10.5 mL	Volume Oil Total	28.4 mL
Tank Configuration	N/A	Tank A Conditioner	plodigy	Tank B Conditioner	plodigy

	START	STOP	LOADS	SPEED	TANK	CROSSED	START	END	FEET	T.O.N
1	3L	3R	2	14	B	70	0.0	1.9	1.9	3500
2	5L	5R	2	14	B	62	1.9	5.8	3.9	3100
3	9L	9R	2	14	B	46	5.8	9.7	3.9	2300
4	9L	9R	3	18	B	69	9.7	17.3	7.6	3450
5	12L	12R	3	18	B	51	17.3	24.9	7.6	2550
6	13L	13R	2	18	B	30	24.9	30.0	5.1	1500
7	13L	13R	2	22	B	30	30.0	36.2	6.2	1500
8	2L	2R	0	26	B	0	36.2	43.0	6.8	0

	START	STOP	LOADS	SPEED	TANK	CROSSED	START	END	FEET	T.O.N
1	2L	2R	0	30	A	0	43.0	35.0	-8.0	0
2	15L	15R	1	26	A	11	35.0	31.4	-3.6	550
3	13L	13R	1	22	A	15	31.4	28.3	-3.1	750
4	12L	12R	2	18	A	34	28.3	23.2	-5.1	1700
5	9L	9R	3	18	A	69	23.2	15.8	-7.6	3450
6	6L	6R	2	18	A	50	15.8	10.5	-5.1	2500
7	5L	5R	1	14	A	31	10.5	8.6	-1.9	1550
8	2L	2R	0	14	A	0	8.6	0.0	-8.6	0

Cleaner Ratio Main Mix	NA	Forward
Cleaner Ratio Back End Mix	NA	Reverse
Cleaner Ratio Back End Distance	NA	Combined

Buffer RPM: 4 = 720 | 3 = 500 | 2 = 200 | 1 = 50

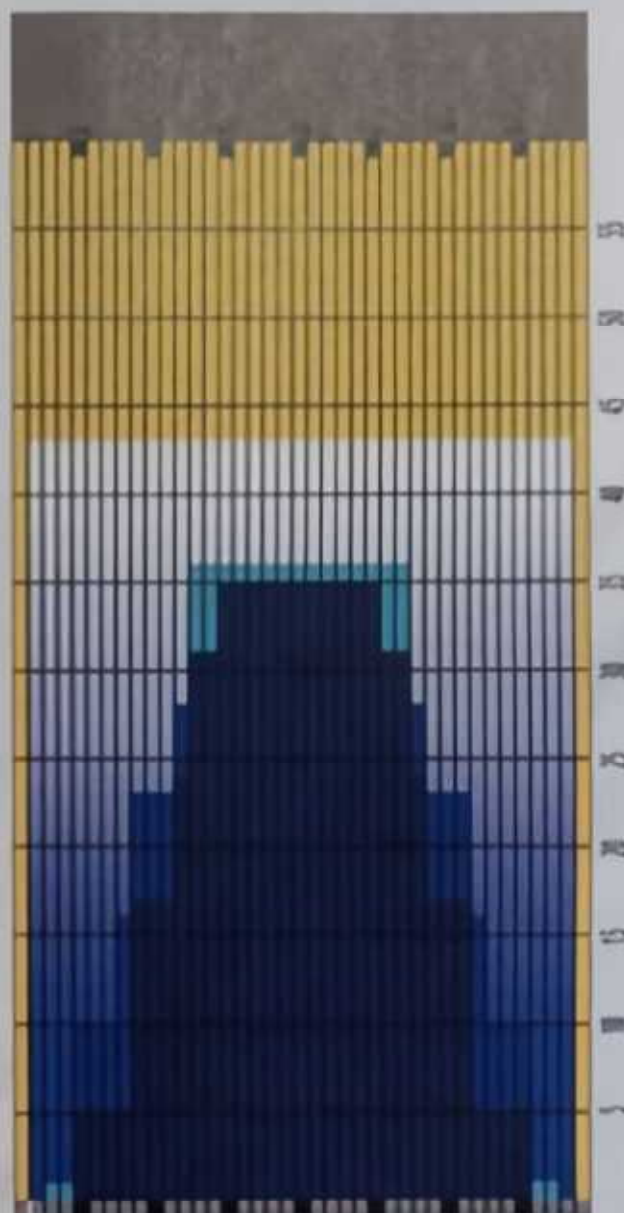

Item	3L-7L:16L-16R	6L-12L:16L-16R	13L-17L:16L-16R	16L-16R:17R-13R	16L-16R:12R-8R	16L-16R:7R-3R
Description	Outside Track: Middle	Middle Track: Middle	Inside Track: Middle	Middle: Inside Track	Middle: Middle Track	Middle: Outside Track
Track Zone Ratio	6.84	1.81	1.02	1.02	1.81	6.84

